

STATE OF WEST VIRGINIA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
OFFICE OF OIL AND GAS

 ORIGINAL

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: GEORGE KING Operator Well No.: KING #1  
LOCATION: Elevation: 962' Quadrangle: ELKHURST 7.5'  
District: UNION County: CLAY  
Latitude: \_\_\_\_\_ Feet South of \_\_\_\_\_ Deg. \_\_\_\_\_ Min. \_\_\_\_\_ Sec.  
Longitude: \_\_\_\_\_ Feet West of \_\_\_\_\_ Deg. \_\_\_\_\_ Min. \_\_\_\_\_ Sec.

Well Type: OIL X GAS X

Company CUNNINGHAM ENERGY, LLC Coal Operator NO COAL LISTED ON TITLE  
3230 PENNSYLVANIA AVENUE or Owner \_\_\_\_\_  
CHARLESTON, WV 25302 \_\_\_\_\_  
Agent RYAN E. M. CUNNINGHAM Coal Operator \_\_\_\_\_  
Permit Issued Date 5/29/2014 or Owner \_\_\_\_\_

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of KANAWHA ss:

ROGER McCOMAS and TERRY HUFFMAN, II being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well say that said work was commenced on the 3RD day of JUNE, 2014, and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
6% Gel	Between all plugs			
CEMENT	1800'	1635'		
CEMENT	1616'	1516'	1600' 3 1/2" CASING	3 1/2" PACKER FROM 1635' TO TD
CEMENT	987'	787'		
CEMENT	502'	402'	448' 5 3/16" CASING	1292' 5 3/16" CASING
CEMENT	200'	SURFACE		


Description of monument: ERECT MONUMENT WIHT API 47-1502886  
said well was completed on the 12TH day of JUNE, 2014.

and that the work of plugging and filling  
Office of Oil and Gas  
WV Department of Environmental Protection

And further deponents saith not.

Sworn and subscribe before me this 11th day of June, 2014

My commission expires: 2/10/2015

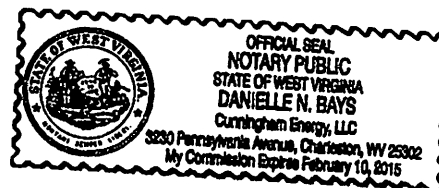

Notary Public

Affidavit reviewed by the Office of Oil and Gas:

Title: Inspector

6/16/14 Did not witness all plugs

COPY

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

**MCELROY COAL COMPANY**  
Coal Operator or Owner  
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041  
Address  
**MCELROY COAL COMPANY**  
Coal Operator or Owner  
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041  
Address  
**VAN AND VICKIE ASTON**  
Lease or Property Owner  
763 BRUSHY RIDGE ROAD, GLEN EASTON, WV 26039  
Address

**MCELROY COAL COMPANY**  
Name of Well Operator  
6126 ENERGY DRIVE MOUNDSVILLE, WV 26041  
Complete Address  
**GLEN EASTON, WV 7.5'**  
Well Location  
**CAMERON**  
District  
**MARSHALL**  
County  
**M-1750**  
Well No.  
**ASTON, VAN L.**  
Farm

STATE INSPECTOR SUPERVISING PLUGGING

*Jana J. Holbe*  
AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of MONONGALIA ss:

**DELBERT MOORE** and **KEVIN S. WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 16<sup>th</sup> day of April, 2014 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Cleaned 12 1/4" hole from the surface to 569'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 569' to 1151'. Tagged top of 8 5/8" casing at 1151'. Reduced hole to 7 7/8" Cleaned 7 7/8" hole from 1151' to 1690'. Reduced hole to 6 1/4". Cleaned 6 1/4" hole from 1690' to 1828'. Tagged solid plug at 1828'. Cleaned 9 7/8" hole through the Pittsburgh Coal seam from 615' to 622'. Left 249' of 8 5/8" casing in the hole from 1151' to 1400'. Cut remaining 8 5/8" casing at the following depths: 1300' and 1200'.	16" Casing  8 5/8" Casing	0'  0'	20'  249'	
<u>Cemented hole from 1828' to the surface as follows:</u> From 1828' to 822' with 239 sacks of Expandable Cement. From 822' to 515' with 190 sacks of Thixotropic Cement with Green Dye. From 515' to the surface with 341 sacks of Expandable Cement. A total of 770 sacks of both cements were used to cement the hole from 1828' to the surface. Cement did circulate at the surface. Left 20' of 16" conductor casing in the hole from the surface to 20'.				
Coal Seams		Description of Monument		
Pittsburgh	(615' - 622')	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		

RECEIVED  
Office of Oil and Gas  
JUN 18 2011  
WV Department of Environmental Protection

... and that the work of plugging and filling said well was completed on the 11th day of 1981.

... and that the work of plugging and filling said well was completed on the 2<sup>nd</sup> day of May, 2014.


And further deponents saith not.

*Delbert Moore*  
Delbert Moore  
*Kevin S. Wright*  
Kevin S. Wright

Sworn to and subscribed before me this 15<sup>th</sup> day of May 2014

*Kara Beth Foster*  
Notary Public

My commission expires: 11/4/23



Permit No. 47-51-01747-P  
Well No. M-1750

RECEIVED  
Office of Oil and Gas  
JUN 18 2014  
WV Department of  
Environmental Protection

STATE OF WEST VIRGINIA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
OFFICE OF OIL AND GAS

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

Farm name: O. D. Stockley Operator Well No.: 193

LOCATION: Elevation: 1023 Quadangle: Newton  
District: Geary County: Roane  
Latitude: \_\_\_\_\_ Feet South of \_\_\_\_\_ Deg. \_\_\_\_\_ Min. \_\_\_\_\_ Sec.  
Longitude: \_\_\_\_\_ Feet West of \_\_\_\_\_ Deg. \_\_\_\_\_ Min. \_\_\_\_\_ Sec.

Well Type: OIL \_\_\_\_\_ GAS liq. inj.

*easting 0486563  
northing 4267627*

Company Triad Hunter LLC  
125 Putnam Street  
Marietta, Ohio 45750

Coal Operator na  
or Owner \_\_\_\_\_

Agent Kim Arnold

Coal Operator na  
or Owner \_\_\_\_\_

Permit Issued Date 5-23-14

**RECEIVED**  
**Office of Oil & Gas**

JUN 11 2014

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of Roane ss:

Rickey Duckworth and Robert Stewart

being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above named well operator, and participated in the work of plugging and filling the above well say that said work was commenced on the 2 day of June, 2014, and the well was plugged and filled in the following manner:

TYPE	FROM	TO	PIPE REMOVED	LEFT
cement	1950	1700	1050ft. of 41/2	914 ft.
cement	1075	975		
cement	260	160		
cement	100	0		

Description of monument: 5in. pipe with API no. welded on plate  
said well was completed on the 5 day of June, 2014.

And further deponents saith not.

*Rickey Duckworth*  
*Robert A. Stewart*

Sworn and subscribe before me this 9 day of June, 2014

and that the work of plugging and filling

My commission expires: 10/7/2023

*Timothy E Keaton*  
Notary Public



*Inspector*  
*6/16/14*  
*Don't withdraw all plugs*

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

**COALQUEST DEVELOPMENT, LLC**  
Coal Operator or Owner  
2708 CRANBERRY SQUARE MORGANTOWN, WV 26508  
Address

**COALQUEST DEVELOPMENT, LLC**  
Coal Operator or Owner  
2708 CRANBERRY SQUARE MORGANTOWN, WV 26508  
Address

**SHIRLEY J. NEWTON**  
Lease or Property Owner  
RR4, BOX 198, GRAFTON, WV 26354  
Address

**ICG TYGART VALLEY, LLC**  
Name of Well Operator  
2708 CRANBERRY SQUARE MORGANTOWN, WV 26508

Complete Address  
**THORNTON (638)**  
Well Location  
**KNOTTSVILLE**  
District  
**TAYLOR**  
County  
**J-1220**  
Well No.  
**SHACKLEFORD, HOWARD**  
Farm

STATE INSPECTOR SUPERVISING PLUGGING

AFFIDAVIT

STATE OF WEST VIRGINIA,  
County of **MONONGALIA** ss:

**RUSSELL SMALLWOOD** and **KEVIN S. WRIGHT** being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by ICG Tygart Valley, LLC well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 6<sup>th</sup> day of May, 2014 and that the well was plugged in the following manner:

Formation	Filling Material	Casing Size & Kind	Casing Pulled	Casing Left In
Cleaned 3 1/2" hole from Surface to 5100'. Tagged solid plug at 5100'. Cemented bottom hole from 5100' to 2275' with 170 sacks of Expandable Cement with Gas Blocker. Removed 2275' of 4 1/2" casing from Surface to 2275'. Left approximately 2954' of 4 1/2" casing in the hole from 2275' to 5229' (depth taken from old well record) due to cement bond. Cleaned 7 7/8" hole from Surface to 2275'. Left 500' of drill string in the hole from 2275' to 1775' due to extreme caving, which caused the drill string to get stuck in the hole. Section milled 8 5/8" casing from 656' to 729' through the Lower Kittanning Coal seam, which is from 686.8' to 692.5'. Left 928' of 8 5/8" casing in the hole from Surface to 656' and from 729' to 1001'. Possible small junk metal left in the hole through the Lower Kittanning Coal seam from 686.8' to 692.5'.		16" Casing  8 5/8" Casing  4 1/2" Casing	0'  Milled 73'  2275'	6 1/2'  928'  ~2954'
<u>Cemented hole from 5100' back to surface as follows:</u> From 5100' to 2275' with 170 sacks of Expandable Cement with Gas Blocker. From 2275' to 1110' with Freshwater Gel. From 1110' to 570' with 180 sacks of Thixotropic Cement with Green Dye. From 570' to Surface with 150 sacks of Expandable Cement. A total of 650 sacks of cement were used to cement the hole from 5100' to the Surface. Cement did circulate at the surface. Left 6 1/2' of 16" conductor casing in the hole from the surface to 6 1/2'.		RECEIVED Office of Oil and Gas  JUN 16 2014  WV Department of Environmental Protection		
Coal Seams		Description of Monument		
LOWER KITTANNING	686.8' to 692.5'	77" of 7" casing w/company name, well number,		
(Name)		permit number and date cemented stated on 7"		
(Name)		casing. Well marker will be attached to the		
(Name)		cement plug at ground level.		

... And that the work of plugging and filling said well was completed on the 27<sup>th</sup> day of May, 2014

And further deponents saith not.

Sworn to and subscribed before me this 6<sup>th</sup> day of June 2014

My commission expires: November 4, 2023

**RECEIVED**  
**Office of Oil & Gas**

*Russell Smallwood*  
Russell Smallwood

*Kevin S. Wright*  
Kevin S. Wright

*Kara Beth Ford*  
Notary Public

Permit No. **47-91-00507-P**  
Well No. **J-1220**

